SOLTIS
86

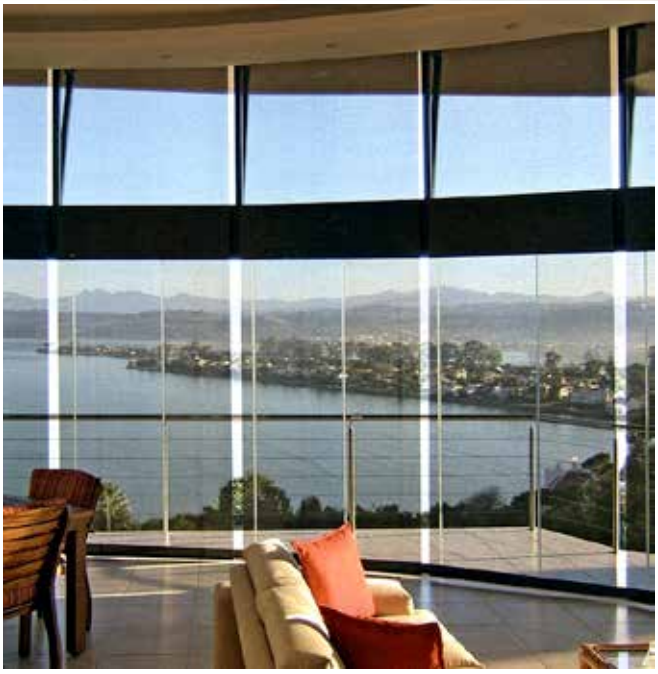

WORLD OF
AWNINGS
& CANOPIES

WORLD OF AWNINGS

SOLTIS 86

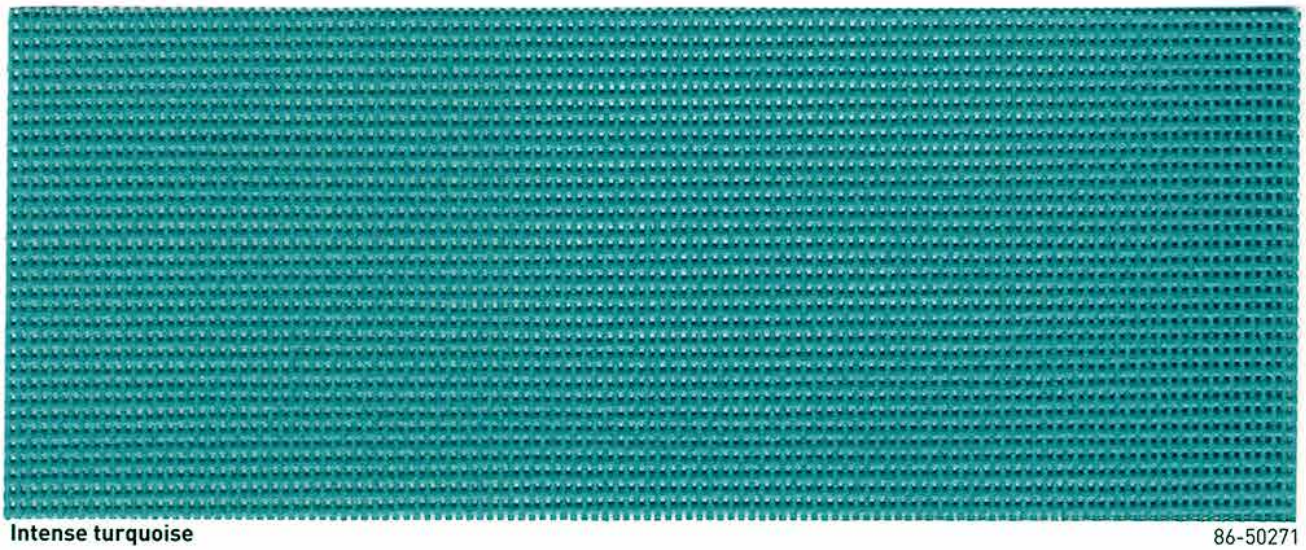

Intense turquoise 86-50271

Emerging colors

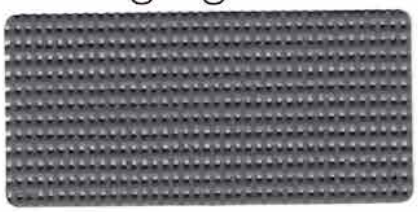

Concrete 86-2167

Boulder 86-2171*

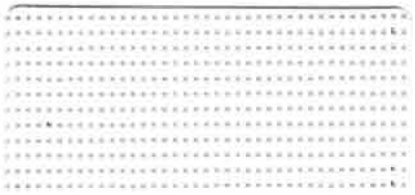

White NF 86-2044*

Alu/Alu NF 86-2048

Alu/Oat NF 86-2046*

Design illusion

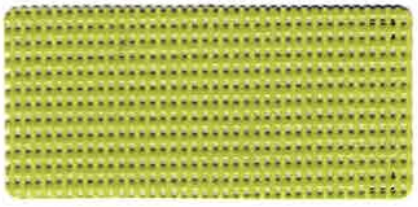

Bamboo 86-50333

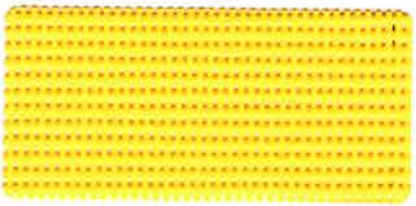

Buttercup 86-2166

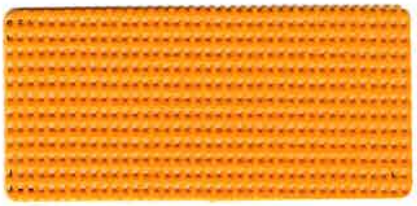

Orange 86-8204

Plum 86-50336

* Also available in 105.1 inches width

WORLD OF AWNINGS & CANOPIES

Evolving with time

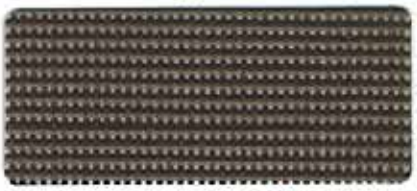

Bronze NF 86-2043*

Muscat 86-50260

Caramel 86-50261

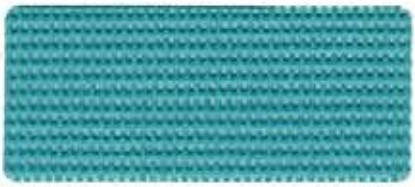

Intense turquoise 86-50271

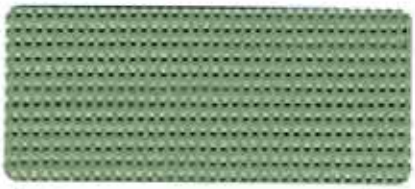

Moss green 86-2158

Body language

Cocoa 86-2148

Pepper 86-2012*

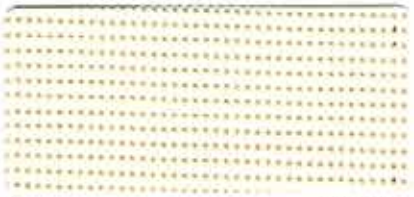

Champagne 86-2175

Sandy beige 86-2135*

Distinction

Navy 86-50342

Midnight blue 86-2161

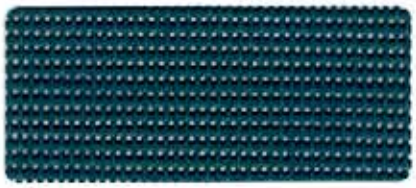

Dark teal 86-50264

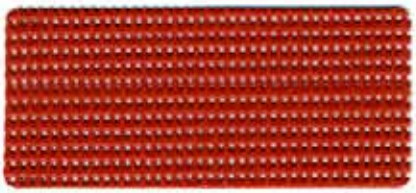

Red 86-8255

Black NF 86-2053*

Anthracite NF 86-2047*

Beaten-metal NF 86-2045*

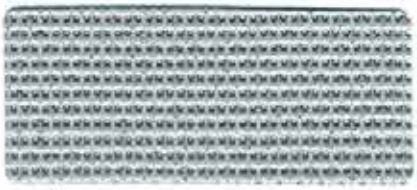

Alu/Anthracite 86-2068

WORLD OF AWNINGS & CANOPIES

Exclusive **Précontraint Serge Ferrari®** technology

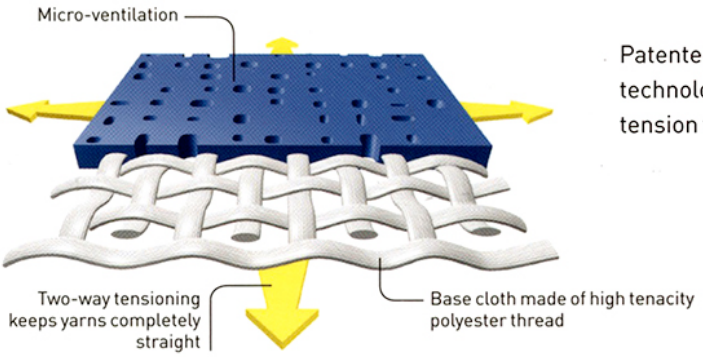

Patented worldwide, Précontraint Serge Ferrari® technology involves keeping the composite under tension throughout the manufacturing cycle.

Strength characteristics	Benefits
• Exceptional dimensional stability	• **No material deformation during installation or usage**
• Long-term strength	• **No elongation, tear resistant**
• Greater coating thickness at the top of the yarns	• **Long-term strength and aesthetic quality**
• Exceptional flatness	• **Smooth surface, easy upkeep** • **Easy rolling**
• Thinness	• **Space saving**
• Flexibility	• **Easy to handle and install**

NF Toiles certification

- The French "NF Toiles" label guarantees that Soltis 86 maintain a high level of quality and homogeneity.
- Certified references meet thermo-optical, strength and durability requirements stipulated for the "NF Toiles" label.
- Certification application pending for new colors (solar and light properties quoted provisionally).

Solar and light properties (EN 14501)

References		TS	RS	AS	TV n-h	TV n-n	g_{tot}*	g_{tot}'	NCS Codification
86-2012		18	27	55	17	16	0.15	0.48	S 4010 Y 30 R
86-2043		12	10	78	11	13	0.12	0.53	-
86-2044		32	59	9	30	14	0.21	0.38	S 0500 N
86-2045		14	29	57	14	13	0.12	0.47	-
86-2046	A	21	43	36	20	14	0.16	0.43	-
86-2046	B	19	58	23	19	14	0.14	0.38	-
86-2047		16	7	77	16	15	0.14	0.54	-
86-2048		22	42	36	22	16	0.17	0.43	-
86-2053		15	5	80	15	13	0.14	0.54	S 8500 N
86-2068	A	16	35	49	15	15	0.13	0.45	-
86-2068	B	16	7	77	15	15	0.14	0.54	-
86-2135		20	41	39	20	16	0.15	0.43	S 2005 Y 50 R
86-2148		14	13	73	14	13	0.13	0.52	S 7010 Y 30 R
86-2158		15	25	60	14	12	0.13	0.48	S 4020 G 30 Y
86-2161		16	17	67	14	14	0.14	0.51	S 5040 R 80 B
86-2166		30	45	25	26	15	0.21	0.42	S 0570 Y 10 R
86-2167		15	17	68	14	13	0.13	0.51	S 6005 R 80 B
86-2171		19	39	42	17	14	0.15	0.44	S 2502 B
86-2175		28	57	15	26	14	0.19	0.39	S 0505 Y 20 R
86-8204		27	41	32	19	14	0.19	0.44	S 0585 Y 40 R
86-8255		23	24	53	17	16	0.18	0.49	S 1580 Y 90 R
86-50260		15	13	72	14	13	0.14	0.52	S 5040 R
86-50261		21	35	44	15	14	0.16	0.45	S 3050 Y 60 R
86-50264		17	11	72	16	16	0.15	0.52	S 6030 B 30 G
86-50271		21	34	45	15	14	0.16	0.46	-
86-50333		22	32	46	19	15	0.17	0.46	S 2070 G 70 Y
86-50336		19	15	66	15	14	0.16	0.51	S 7020 R 30 B
86-50342		16	9	75	14	14	0.14	0.53	S 2020 R 80 B

A: Aluminium face exposed to the sun
B: Colored face exposed to the sun

TS: Solar Transmission (%)
RS: Solar Reflection (%)
AS: Solar Absorption (%)
TS + RS + AS = 100% of incident energy
g_{tot}*: External solar factor
g_{tot}': Internal Solar Factor
Type "C" glazing: insulating, slightly emissive double glazing in position 3 (4 + 16 + 4; argon-filled - g=0.59 - U=1.2.).

TV n-h: Normal-hemispherical visible light transmission (%)
TV n-n: Normal-normal visible light transmission (%)

MAIN FEATURES

- Perfect compromise between thermal protection and visual comfort
- Excellent outward visibility
- Weather and UV resistance
- Lightweight, durable and 100% recyclable

APPLICATIONS

- Solar Screens
- Skylight Shades
- Shadesails
- Awnings
- Retractables

WORLD OF AWNINGS & CANOPIES

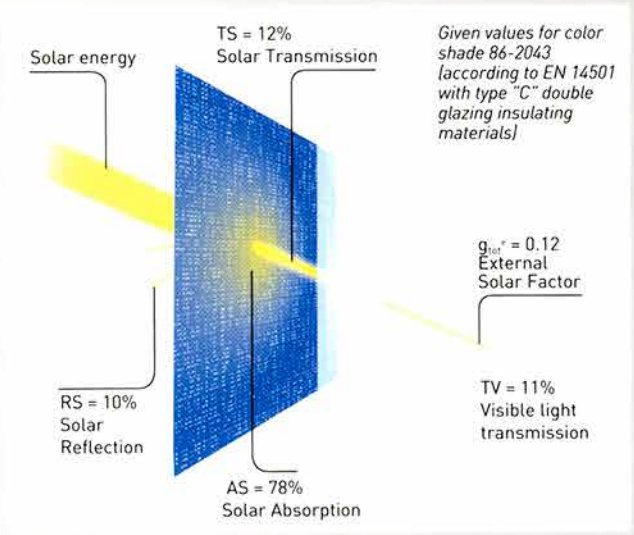

Installed externally, Soltis 86 blocks up to 88% of the solar radiation

Thermal protection and light control

Soltis 86 offers a mesh opening, ideal for combining:

- efficient solar protection,
- sufficient natural light contribution to ensure occupier well-being.

Soltis 86 therefore plays a full part in:

- building thermal control,
- creating pleasant, appropriate light environments,
- energy reduction.

Seamless large dimensions possible

Matchless transparency

Soltis 86's micro-ventilated texture ensures:

- excellent visual contact with the exterior: the view is not hidden,
- visual comfort appreciated in many architectural situations.

Color harmony for combining blinds, textile facades and permanent awnings

Harmonized ranges

All Soltis 86 colors are coordinated with Soltis 92 to:

- coordinate all facades of a building,
- satisfy visual comfort requirements for each facade orientation,
- regulate thermal protection to provide energy savings.

SOLTIS 86

Technical properties	Soltis 86	Standards
Weight	11.2 oz/sqyd	EN ISO 2286-2
Thickness	430 microns	
Width	69.7 inches - 105.1 inches	
Length of rolls		
Standard format length in 69.7 inches wide	54.68 yds	
Standard format length in 105.1 inches wide	43.74 yds	
Physical properties		
Tensile strength (warp/weft)	230/160 daN/ 5 cm	EN ISO 1421
Tear strength (warp/weft)	45/20 daN	DIN 53.363
Fungistatic treatment	Degree 0, excellent	EN ISO 846-A
Flame retardancy		
Rating	**B1**/DIN 4102-1 • BS 7837 • BS 5867 • **Schwerbrennbar-Q1-Tr1**/ONORM A 3800-1 • **Classe 1**/UNI 9177-87 • **M1**/UNE 23.727-90 • **VKF 5.2**/SN 198898 • 1530.3/**AS**/NZS • **G1**/GOST 30244-94 • **Method 1**/NFPA 701 • CSFM T19 • **Class A**/ASTM E84	
Euroclass	**B-s2,d0**/EN 13501-1	
Management systems		
for Quality		ISO 9001
Certifications, labels, guarantees, recycling		

The technical data above are averaged values with a +/- 5% tolerance.
The buyer of our products is fully responsible for their application and their transformation with regard to any possible third party. The buyer of our products is responsible for their implementation and installation according to the standards, workmanship and safety regulations in force in destination countries. For information on our contractual warranty, please refer to the relevant terms and conditions.
The values quoted above represent results of tests performed in compliance with common design practices and are provided for information only to enable customers to make the best use of our products. Our products are subject to changes based on technical advances and we reserve the right to modify their characteristics at any time. The buyer of our products is responsible for checking the validity of the above data.

WORLD OF AWNINGS & CANOPIES

7830 San Fernando Road
Sun Valley, CA 91352
Tel. [818] 767.0095 Fax. [818] 767.0096
www.aworldofawnings.com